

23-413 REUSABLE ANCHOR

Used to provide a temporary, reusable anchor point for residential construction applications. Approved for use on both wood and metal roofing.

- 14 Gauge reusable steel anchor with clear chromate finish.
- Meets OSHA 1926.502(d)(16)(v) requirements.
- Must be used only with approved components that limit the fall arresting forces to 900 lb or less.
- Support structure at anchor site must be capable of supporting a 5,000 lb static load.




Product Weight	Case Qty
1.25 lb	30

23-415 SINGLE PLATE HEAVY DUTY ANCHOR

Reusable, easy to install anchor point.

- Compatible with both wood and steel substrates.
- Special hole configuration for a safer and more convenient installation of fasteners.
- Can be installed with screws or duplex nails.
- Fits up to 12/12 roof pitch.
- Fasteners included.

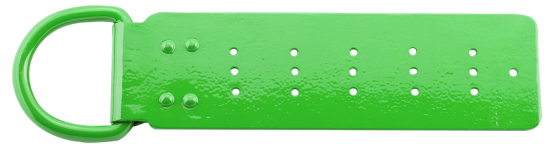

Product Weight	Case Qty
2.00 lb	3 / 18

23-416 DUAL PLATE HEAVY DUTY ANCHOR

Reusable, easy to install anchor point.

- Compatible with both wood and steel substrates.
- Special hole configuration for a safer and more convenient installation of fasteners.
- Can be installed with screws or duplex nails.
- Fits up to 12/12 roof pitch.
- Fasteners included.



Product Weight	Case Qty
2.88 lb	10

23-417

SINGLE RING RETROFIT ANCHOR

Designed to be installed by removing only a portion of the ridge. Conventional flashing system not required.

- Works with vented & non-vented ridge caps.
- Perfect for asphalt, wood & metal roofs.
- Butyl strip flashing included.
- Low profile design can be painted to match roof.
- Complies with all OSHA and ANSI standards.
- Includes stainless steel fasteners.



Product Weight	Case Qty
0.79 lb	20

23-418

DOUBLE RING RETROFIT ANCHOR

Designed to be installed by removing only a portion of the ridge. Conventional flashing system not required.

- Works with vented & non-vented ridge caps.
- Perfect for asphalt, wood & metal roofs.
- Butyl strip flashing included.
- Low profile design can be painted to match roof.
- Complies with all OSHA and ANSI standards.
- Includes stainless steel fasteners.



Product Weight	Case Qty
0.79 lb	20

23-406

7³/₄" SINGLE RING RETROFIT ANCHOR

D-ring anchor designed for permanent or temporary use. The length is ideal for shingle type roofs allowing the anchor to be attached over the roofing material.

- Works with vented and non-vented ridge caps, ideal for use on hip corners, ridgelines, shed roofs and other nonstandard areas.
- Perfect for asphalt, wood and metal roofs. The low profile design can be painted to match the roof.
- Stainless steel fasteners and butyl strip flashing included.
- Rated for one person in fall arrest or fall restraint with a maximum combined weight of 310 lb (140 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.



Product Weight	Case Qty
0.44 lb	20

23-426

2 x 4 CLAW TYPE ANCHOR KIT

Permanent fall protection anchor to be fixed to wood or steel framed top chords, or other framing members.

- Permanent anchor point to be installed on 2x4 framing members.
- 430 stainless steel 11 gauge body with a minimum tensile strength of 5,000 lb (22.5 kN).
- 100% waterproof with PVC flashing system and cover cap for stem included.
- Rated for one person in fall arrest or fall restraint with a maximum weight of 340 lb (154 kg).
- Designed to meet or exceed CSA, OSHA and ANSI standards.



Product Weight	Case Qty
1.60 lb	20